

Pneumatic Caulking Gun with Air Flow Regulator

Description:

Pneumatic applicator for the extrusion of sealant products and adhesives that are packaged in standard plastic or aluminum cartridges.

The pneumatic air caulking gun is shipped with the air flow regulator already installed for ease of use right out of the box.

Applications:

For use with standard plastic and metal cartridges (10 oz. - 290/310 ml)

Packaging:


Single gun in neutral outer box

Features:

- Easy grip trigger
- All metal construction
- Pressure release valve stops product flow
- Airflow regulator included and installed

Specifications:

Weight	350 gr / 0.75 lbs
Connection	¼" NPT air connector
Pressure	4 – 8 bar / 60 – 120 psi
Country of Origin	Italy
Item #	RCNE-R

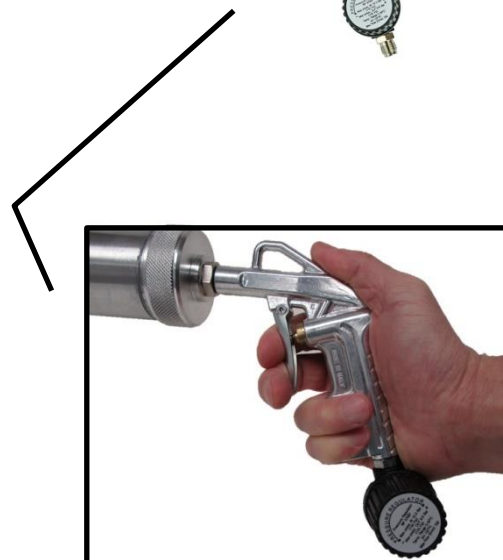

The above information is given in good faith, but the user should assure himself that the performance of the product is sufficient for his application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Chemicar USA cannot be held responsible for product failure unless full testing has been carried out. The client has to decide on the products suitability for their own applications.